

BARRIER GLAND NON-ARMOURED CABLES


OS-EXBF-A

APPLICATION

BARRIER GLAND FOR USE WITH NON-ARMOURED AND BRAIDED CABLES

EX 'DB' BARRIER TYPE

LIQUID COMPOUND RESIN TYPE

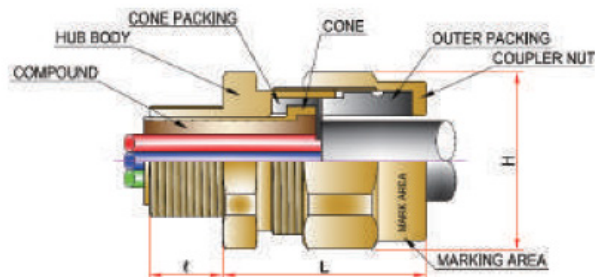

Part No.	Entry Thread Size (M)	Minimum thread Length	Cable Outer Diameter	Hexagonal Dimensions	Length (L)
OS-EXBF-A-16M16	M16	15	5.0 - 10.0	H25 X P27	34
OS-EXBF-A-16M20	M20	15	5.0 - 10.0	H25 X P27	34
OS-EXBF-A-20	M20	15	7.5 - 13.5	H31 X P34	38
OS-EXBF-A-25	M25	15	13.0 - 18.1	H37 X P40	42
OS-EXBF-A-32	M32	15	16.5 - 24.5	H47 X P50	45
OS-EXBF-A-40	M40	15	23.0 - 31.5	H56 X P60	50
OS-EXBF-A-50	M50	15	29.0 - 40.1	H70 X P75	53
OS-EXBF-A-63	M63	15	39.0 - 52.1	H77 X P82	57
OS-EXBF-A-63X	M63X	15	46.0 - 54.1	H82 X P88	58
OS-EXBF-A-75	M75	20	52.0 - 60.9	H92 X P100	59
OS-EXBF-A-75X	M75X	20	59.0 - 65.9	H98 X P106	61
OS-EXBF-A-90	M90	25	66.0 - 77.8	H110 X P120	71
OS-EXBF-A-100	M100	25	76.0 - 88.8	H125 X P135	73
OS-EXBF-A-115	M115	25	88.0 - 99.8	H135 X P143	78