

Armoured/Braided Cable Gland OSCU Type

APPLICATION

For use with any types of armoured or braided cable
Outdoor & Indoor use
EMC Gland (360° Contact) – EMC tested
Single Compression

DESIGN SPECIFICATION


BS 6121, IEC 62444, EN/IEC 60529

PROTECTION

IP66

MATERIAL

Brass with Nickle plated
For Stainless Steel add /SS to part number

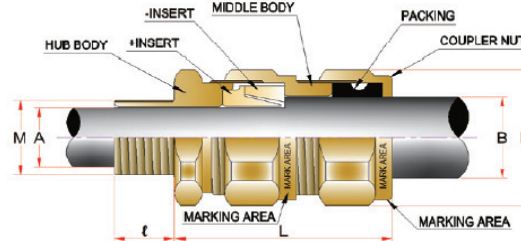

Part no.	Entry Thread Size	Cable Outer Diameter	Armour Size		Hexagonal Dimensions 'H'	Minimum Thread Length	Length
			Wire [W]	Braid [XYZ]			
OSCU-16	M16	9.0 - 16.1	0.9 - 1.25	0.05 - 0.8	H25 X 27	15	67
OSCU-16M20	M16	9.0 - 16.1	0.9 - 1.25	0.05 - 0.8	H25 X 27	15	67
OSCU-20	M20	12.0 - 21.0	0.9 - 1.25	0.05 - 0.8	H31 X 33	15	74
OSCU-25	M25	17.0 - 26.2	1.25 - 1.6	0.05 - 0.8	H37 X 40	15	79
OSCU-32	M32	22.0 - 34.0	1.6 - 2.0	0.05 - 1.2	H47 X 50	15	86
OSCU-40	M40	30.0 - 42.0	1.6 - 2.0	0.05 - 1.2	H56 X 60	15	94
OSCU-50	M50	38.0 - 50.0	1.8 - 2.5	0.05 - 1.2	H70 X 75	15	100
OSCU-63	M63	45.0 - 60.0	1.8 - 2.5	0.05 - 1.2	H77 X 85	15	108
OSCU-63X	M63	55.0 - 66.0	1.8 - 2.5	0.05 - 1.2	H82 X 88	15	108
OSCU-75	M75	58.0 - 72.0	1.8 - 2.5	0.05 - 1.2	H92 X 100	20	125
OSCU-75X	M75	66.1 - 79.0	1.8 - 2.5	0.05 - 1.2	H98 X 106	20	125
OSCU-90	M90	72.0 - 90.0	1.8 - 3.0	0.05 - 1.6	H110 X 120	25	132
OSCU-100	M100	84.0 - 102.0	1.8 - 3.0	0.05 - 1.6	H123 X 133	25	144
OSCU-115	M115	100.0 - 118.0	1.8 - 3.0	0.05 - 1.6	H135 X 143	25	144

NPT Threads available upon request