

Product data sheet

Characteristics

GV2RT08

Motor circuit breaker, TeSys
Deca, 3P, 2.5-4A, thermal magnetic, screw clamp
terminals, toggle handle



Main

Range of product	TeSys GV2
Range	TeSys Deca
Device short name	GV2RT
Product name	TeSys GV2 TeSys Deca
Product or component type	Motor circuit breaker
Device application	Motor protection Motor
Trip unit technology	Thermal-magnetic

Complementary

Poles description	3P
Network type	AC
Utilisation category	AC-3 conforming to IEC 60947-4-1 Category A conforming to IEC 60947-2
Network frequency	50/60 Hz conforming to IEC 60947-4-1
Fixing mode	35 mm symmetrical DIN rail: clipped Panel: screwed (with adaptor plate)
Operating position	Any position
Motor power kW	0.55 kW at 220/230 V AC 50/60 Hz motor protection high peak current 0.75 kW at 220/230 V AC 50/60 Hz motor protection high peak current 1.1 kW at 400/415 V AC 50/60 Hz motor protection high peak current 1.5 kW at 400/415 V AC 50/60 Hz motor protection high peak current 1.5 kW at 440 V AC 50/60 Hz motor protection high peak current 1.5 kW at 500 V AC 50/60 Hz motor protection high peak current 2.2 kW at 500 V AC 50/60 Hz motor protection high peak current 2.2 kW at 690 V AC 50/60 Hz motor protection high peak current 3 kW at 690 V AC 50/60 Hz motor protection high peak current 1 kW at 230/240 V AC 50/60 Hz transformer protection 1.6 kW at 400/415 V AC 50/60 Hz transformer protection 2 kW at 400/415 V AC 50/60 Hz transformer protection 1.6 kW at 440 V AC 50/60 Hz transformer protection 2 kW at 440 V AC 50/60 Hz transformer protection 2 kW at 500 V AC 50/60 Hz transformer protection 2.5 kW at 500 V AC 50/60 Hz transformer protection 2.5 kW at 690 V AC 50/60 Hz transformer protection
Breaking capacity	100 kA Icu at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2 3 kA Icu at 690 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 220/230 V AC 50/60 Hz conforming to IEC 60947-2
Control type	Toggle
[In] rated current	4 A
Thermal protection adjustment range	2.5...4 A
Magnetic tripping current	78 A
[Ue] rated operational voltage	690 V AC 50/60 Hz conforming to IEC 60947-2
[Ui] rated insulation voltage	690 V AC 50/60 Hz conforming to IEC 60947-2
[Ith] conventional free air thermal current	4 A conforming to IEC 60947-4-1

[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2
Power dissipation per pole	2.5 W
Mechanical durability	100000 cycles
Electrical durability	100000 Cycles for AC-3 at 415 V At 415 V
Maximum operating rate	25 cyc/h
Rated duty	Continuous conforming to IEC 60947-4-1
Tightening torque	1.7 N.m on screw clamp terminals
Mechanical robustness	Shocks: 30 Gn conforming to IEC 60068-2-27 Vibrations: 5 Gn, 5...150 Hz conforming to IEC 60068-2-6
Height	89 mm
Width	45 mm
Depth	78.5 mm
Suitability for isolation	Yes conforming to IEC 60947-1 § 7-1-6

Environment

Standards	EN/IEC 60947-2 EN/IEC 60947-4-1
Product certifications	CCC UL CSA EAC BV LROS (Lloyds register of shipping) UKCA
Climatic withstand	Conforming to IACS E10
IK degree of protection	IK04
IP degree of protection	IP20 conforming to IEC 60529
Ambient air temperature for storage	-40...80 °C
Fire resistance	960 °C conforming to IEC 60695-2-11
Operating altitude	2000 m
Ambient air temperature for operation	-20...60 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	250.0 g
Package 1 Height	4.8 cm
Package 1 width	8.5 cm
Package 1 Length	9.4 cm
Unit Type of Package 2	S02
Number of Units in Package 2	24
Package 2 Weight	6.33 kg
Package 2 Height	15.0 cm
Package 2 width	30.0 cm
Package 2 Length	40.0 cm
Unit Type of Package 3	P06
Number of Units in Package 3	384
Package 3 Weight	111.78 kg
Package 3 Height	77.0 cm
Package 3 width	60.0 cm
Package 3 Length	80.0 cm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

GV2RT


Dimensions




X1: Electrical clearance = 40 mm for $U_e < 690$ V

Mounting

Mounting of external operator GV2AP03

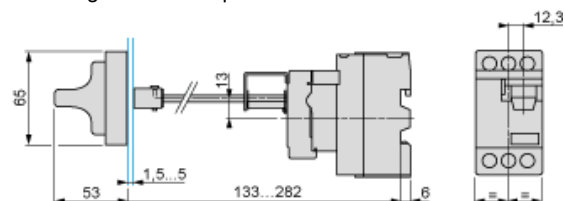


On 35 mm rail

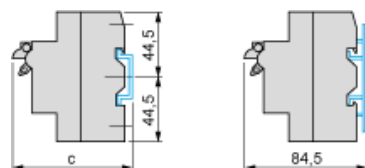

c = 80 on AM1 DP200 (35 x 7.5)


c = 88 on AM1 DE200, ED200 (35 x 15)

On panel with adapter plate GV2AF02




On pre-slotted plate AM1 PA

AF1 EA4



On rails DZ5 MB



GV2ME•• and GV2RT

