


HABITAT

HABITAT-FL-TRI

SAP CODE: 2002012

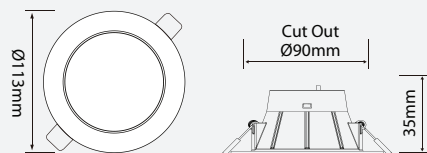


10W, dimmable,
switchable colour
temperature, flush
diffuser

White trimmed LED downlight
with flushed opal diffuser.



Photometric
Diagram



Unit: cd
- C0/180 100.0deg
- C90/270 100.0deg

KEY INFORMATION

Lumen Output	1000 / 1100 / 1100lm
Input Power	10W
Hole Cutout Size	Ø90mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	4yr
IP Rating	IP54
IK Rating	N/A
IC Rating	IC-4

PHOTOMETRIC

Efficacy	100 / 110 / 110lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	100

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	N/A
Power Factor	>0.9
LED Input Current (nominal)	N/A
Useful life @Ta25° (L70)	35,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Spring Clip with plastic cover
Connection Type	1m Flex & Plug
Total Weight	0.3kg
Dimensions	Ø113 x 35mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.